



R171 PERGOZIP

Pergola ombreggiante dal design puro e minimale, dotata di grande praticità, eleganza funzionale e resistenza.

Il telo viene avvolto nel cassonetto d'alluminio e tensionato tramite molle a gas e zip laterali.

Qualità BT Group, che riconosci subito al primo sguardo.



Indicata per ombreggiare strutture esistenti, quali giardini d'inverno, pergolati, pompeiane, anche di grandi dimensioni.




Shading pergola with minimalist design, highly practical, with functional elegance and strength. The cloth is rolled up in aluminum cassette and tightened through gas springs and side zip.
BT Group quality, recognizable at first look.
Suitable to shade existent structures, like winter gardens, pergolas, terraces, also of big dimensions.

Dati tecnici . Technical data


Quote espresse in mm - Dimensions in mm

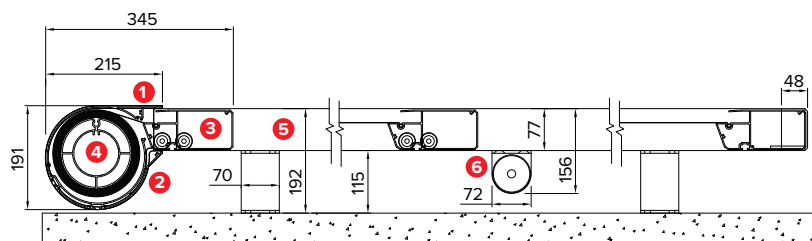


Sede predisposta per LED LAMP
Location provided for LED LAMP



Vista frontale . Frontal view

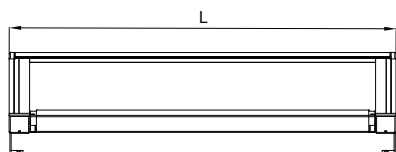

Vista laterale . Side view

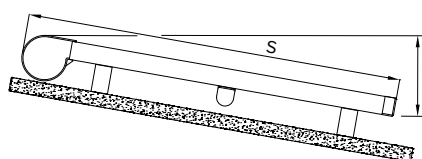

* Sede per inserimento di luci LED o scorrevoli per teli a drappeggio . Location for inserting LED lights or sliders for drapes.

Sporgenza Projection	S cm	200	250	300	350	400	450	500	550	600
Pendenza minima Least inclination	P cm	45	55	60	70	80	125	140	155	170
Frangivento** Wind-break	n°	1	1	1	1	1	1	2	2	2

** Incluso per larghezze superiori a 5 mt. . Included for over mt. 5,00 width.


Si precisa che questa struttura è stata progettata per protezione solare. Adottando pendenze adeguate, e con l'impiego dei frangivento, indicati in tabella, la struttura può offrire anche un riparo da pioggia. Portata massima di pioggia ammessa di circa 8mm/h, pari ad una pioggia di media intensità. In caso di forti temporali si consiglia di ritrarre il telo, onde evitare la formazione di sacche d'acqua, evitando quindi di lasciare la struttura aperta incustodita.

This structure has been projected for sun protection. With suitable slopes, and using windbreaks as indicated in the table, the structure can also offer a shelter from rain. Maximum permissible load of rain about 8mm / h, corresponding to a middle intensity rain. In case of heavy storms it is suggested to retract the cloth in order to avoid creation of water pockets, so avoiding to leave the structure open.


Dettagli tecnici . Technical details

Quote espresse in mm - Dimensions in mm


Squadretta fissaggio guida . Rail fixing bracket

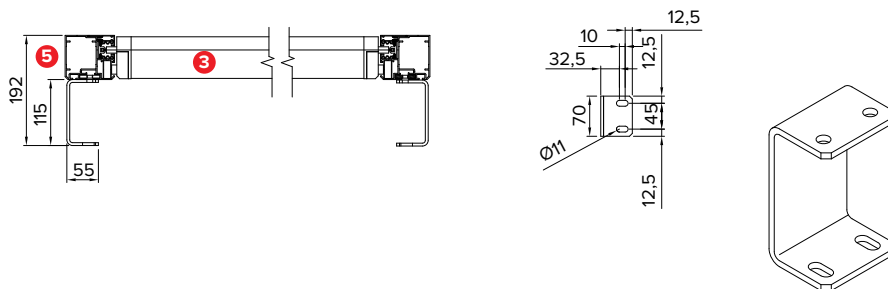


Dettaglio frangivento . Wind-break detail
088-930




Dettaglio guida . Rail detail



Attacco a spallina . Inside application **OPTIONAL**
088-914

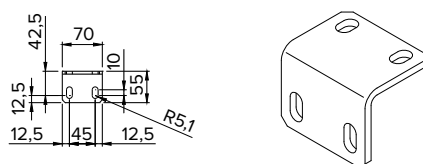

Staffa attacco parete . Wall application bracket **OPTIONAL**
088-902

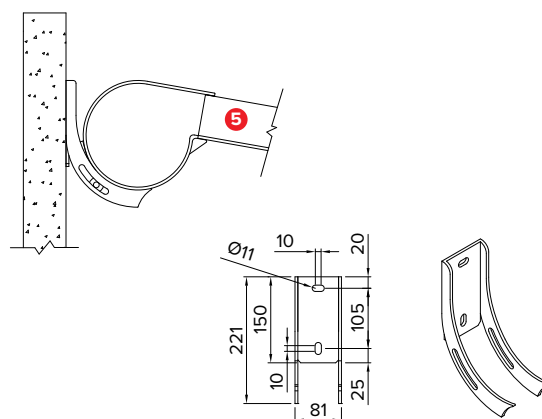

Legenda tecnica . Technical legend

- 1 Cassonetto superiore . Upper cassette
- 2 Cassonetto inferiore . Low cassette
- 3 Terminale scorrevole . Front bar
- 4 Rullo avvolgitore . Tube roll
- 5 Guida . Rail
- 6 Frangivento . Wind-break

- S Sporgenza . Projection
- L Larghezza . Width
- P Pendenza . Inclination